


# Rapid

## Hayrake / Hayrake SR, Bartholet

Turning and raking of fodder in agriculture  
and cuttings in landscape conservation

[www.rapid.ch](http://www.rapid.ch)

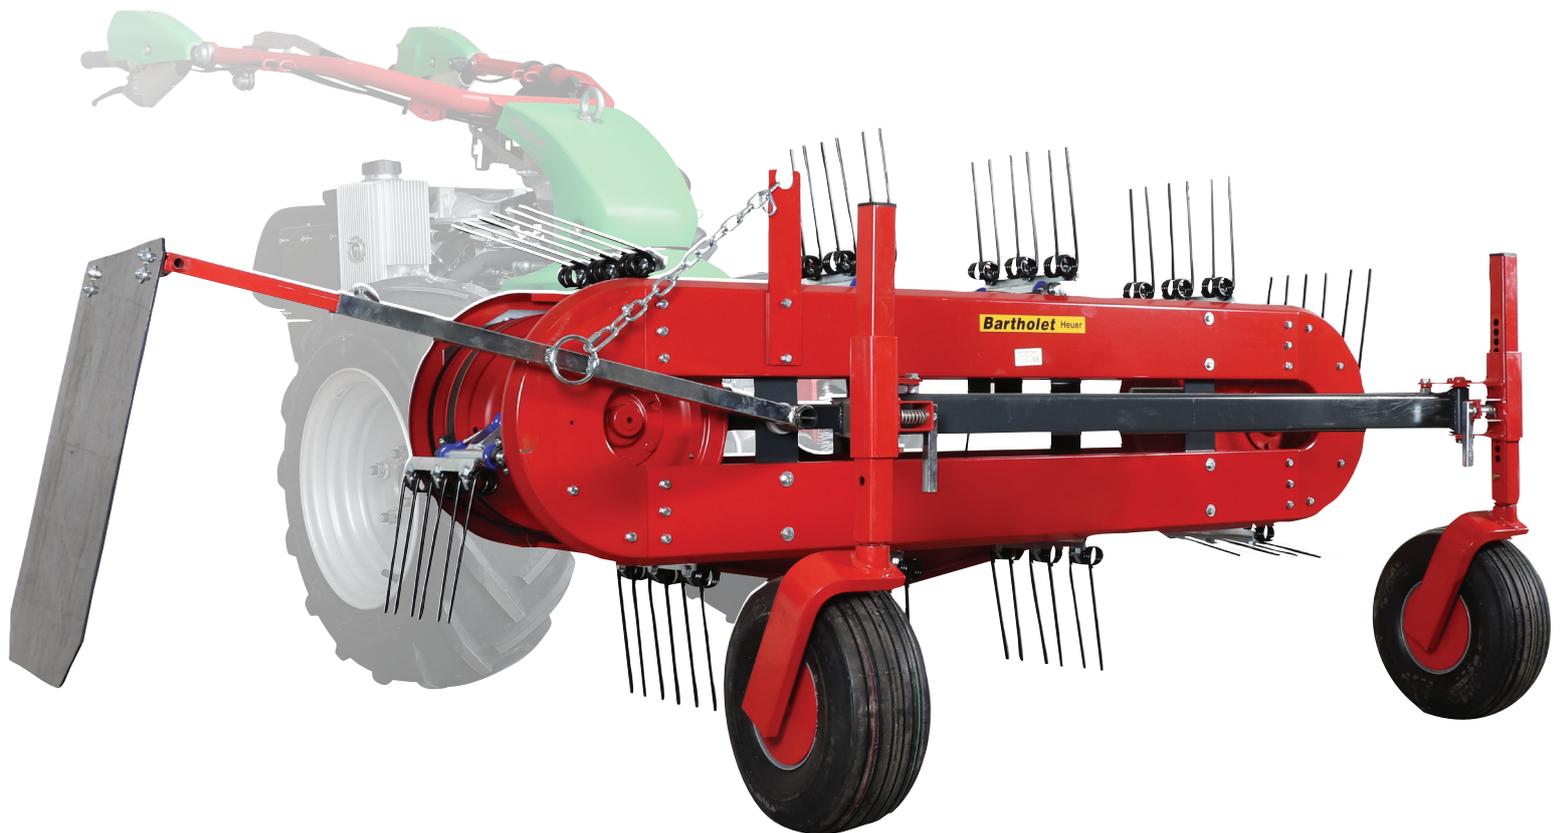

Mowing technology

Forage harvesting

Mulching technology

Cleaning

Tilling

Winter services

Transport

Special applications



# A hayrake can be used to turn and rake windrow green cuttings, wilted grass or dried fodder.



This hayrake is used for subsequent work steps after mowing, both in agriculture and in landscape conservation, in order to be able to efficiently recover the forage or cuttings in a further work step. Controlled tines mounted on belts pick up the cuttings, transport it to the side and deposit it in a swath. The support wheels determine the depth control of the tools and can be adjusted individually.



Hayrake Bartholet (steered)



Hayrake SR Bartholet (Swivel caster wheels)

## OVERVIEW OF MODELS AND FEATURES

Type	5895	5875	5902	5910
	Hayrake, Bartholet	Hayrake, Bartholet	Hayrake SR, Bartholet	Hayrake SR, Bartholet
Working width	150 cm	180 cm	150 cm	180 cm
Total width	180 cm	210 cm	180 cm	210 cm
Support wheels	3.50-8 steered	3.50-8 steered	15 x 6.00-6 Swivel caster wheels	15 x 6.00-6 Swivel caster wheels
Depth guide	Support wheel, 8 Positions	Support wheel, 8 Positions	Support wheel, 8 Positions	Support wheel, 8 Positions
Compatibility	MONTA, VAREA, ORBITO	MONTA, VAREA, ORBITO	MONTA, VAREA, ORBITO	MONTA, VAREA, ORBITO



## Properties of technology

The hayrake model with steered front support wheels is controlled via the steering bar of the attachment. This involves moving the dead man handle to the steering bar on the attachment and the operator operating it with his or her left hand. For S models (in combination with "hayrake steering control") the steering movement is automatically followed by control of the basic machine, for M models (in combination with "external dead man system") the steering movement on the basic machine must be supported by the operator.

The version of the hayrake with swivel caster wheels has no steering bar and no steering linkage. The implement combination is controlled purely via the active steering of the single-axle walk-behind tractor, the swivel caster wheels of the attachment follow the steering movement. This version is suitable for applications on level ground, but is expressly not approved for use on slopes.

## Properties of application

Height adjustment of the support wheels and three pairs of tines per holder ensures a clean raking result. A laterally mounted swath flap supports the clean placement and regular shape of the swath. By raising the ejection side and removing the swath flap, tedding or turning can also be carried out as an additional function.